

High security commercial sites requiring large aperture coverage, and improved insulation properties from the shutter. Ideal for rapid rise / fast action opening and closing when in conjunction with Frequency Inverted motor and appropriate sensory peripherals.



Curtain Slat

Double skinned polyester powder coated 95mm slat with polyurethane foam insulating core.

Colour: Galvanised finish as standard. Plastisol range or powder coating available.

- Profile Height :: 95mm
- Weight per m2 :: 12kg
- Maximum Width :: 7,000mm
- Maximum Surface :: 35m²

Enclosure / Housing

Manufactured from 0.9mm galvanised steel sheet. End caps are fabricated from 3mm - 12mm steel.

Colour: Galvanised finish as standard. Plastisol range or powder coating available.

Shutter Height	(mm)	Box Size (mm)
3700		400
4500		450
5500		500

Note: The above enclosure sizes are based on standard 3-phase motor operation.

Guide Channels / Bottom Slat

Aluminium powder coated bottom slat with EPDM weather seal. Guide channel depth is 85mm as standard.

Colour: Galvanised finish as standard. Plastisol range or powder coating available.


Note: The guide channels are bolted to fixing angles or box section to suit the application.

Operation

Electric: Single phase tubular motor or 3-phase outboard motor with push button control. Numerous options such as group or remote control etc available as required. Manual override facility as standard.

CE compliant to all applicable directives and regulations.

Front Face & Profile View

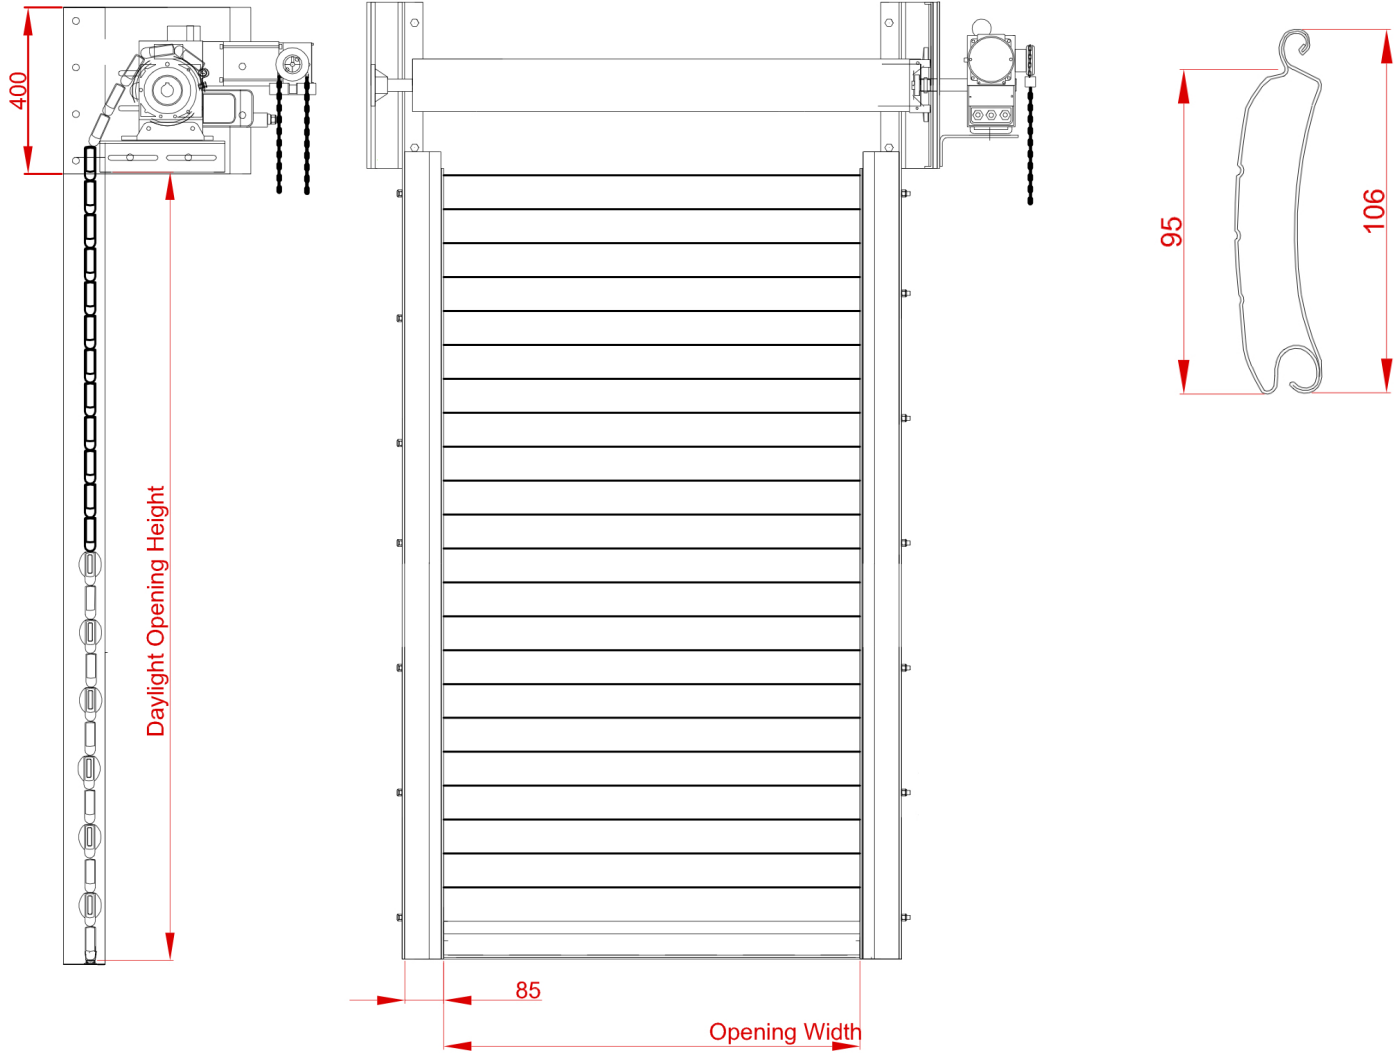

Fixing Options

Guide Options

