




SECTIONAL
GARAGE DOORS

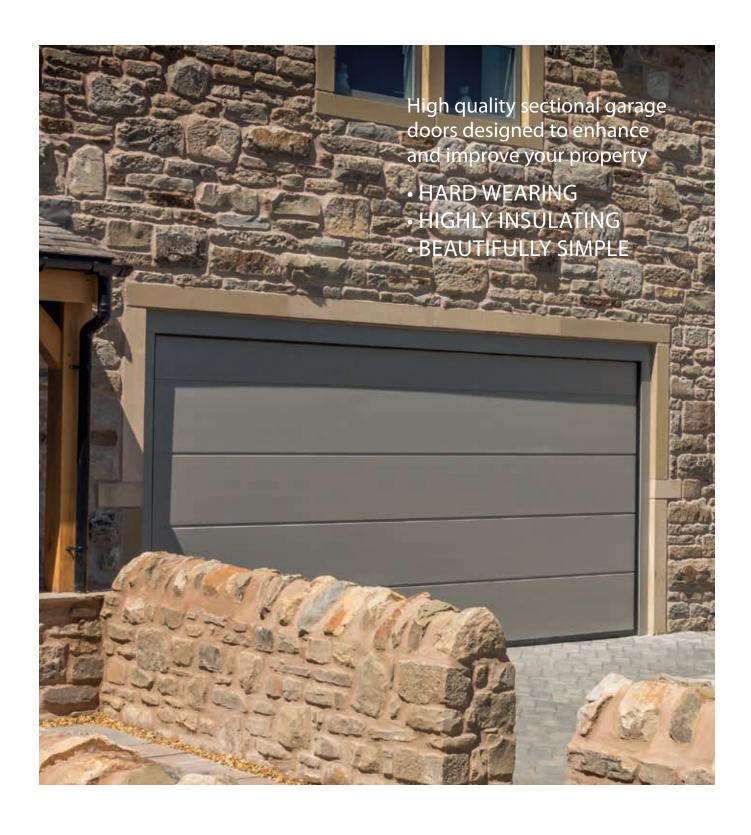

CONTENTS

The range (of Alutech	n garage c	oors 4

The benefits of Trend series sectional doors 6

S-ribbed design **8**

M-ribbed design 10

L-ribbed design 12

Georgian design 14

Microwave design 16

Wicket door options 18

Pass door options 20

Accessories 22

Reveal Fit Options 23

Automation systems 24

Advantages of an Alutech sectional door 26





SECTIONAL DOORS FOR ANY CONDITIONS



Tests in independent laboratories proved that the Alutech door leaf can withstand the harshest environments, including the equivalent of 15 years of operation in coastal areas and heavily polluted industrial regions.

These unique anti-corrosion properties are possible due to:

- thickness of zinc coating (16 micron);
- double layer paint-and-lacquer coating (PUR-PA) 23-35 micron thick.



Trend

Harmony of style and reliability of design.

Warm, reliable and safe doors ensure comfort and convenience. With a wide choice of designs and colours to compliment any style of property, from a traditional period home to a modern day contemporary build.

Trend series sectional doors are safe, practical and price competitive with no compromise on quality.

Characteristics

- The thickness of a sandwich panel is 40 mm
- The thermal transmittance coefficient is 1.35 W/(m²K)

Comparable to a brick wall of 55 cm thickness

- Roller brackets and intermediate hinges are made of galvanised steel
- Can be installed as reveal fit between the brickwork or face fit behind the brickwork
- Curtain balancing with tension springs or torsion springs
- The maximum size of the garage doors is 6000×3000 mm

Trend — affordable, safe and reliable doors



WIDE OPPORTUNITIES OF INSTALLATION



Colour matched side and top profile means that are doors are able to be positioned slightly into the opening if desired.

These elements are manufactured from hot-dipped Galvanised steel, which is further coated with a protective lacquer coating (standard — white colour **RAL 9016**). At your request vertical leg profiles and front fascia header can be painted in the colour of the door leaf so that it will add to the doors harmonious appearance.



PROTECTION AGAINST CORROSION



In heavy rainfall water can collect at the bottom of the doors. **The plastic base of the side profile** minimises the possibility of corrosion in high humidity environments, providing an attractive appearance for both door panels and door frame.



LONG-LASTING OPERATIONAL LIFE



SPRING COVER



EXPOSED SPRING

As an optional upgrade the spring mechanism for side sprung doors can be fully enclosed, to eliminate finger entrapment and to enhance the doors internal appearance.

Lifetime of springs is up to **15000 open/ close** cycles equivalent to **10 years** of service with 4 times daily opening/ closing during the period.

Using advanced technology and years of experience in manufacturing, carefully thought-out design and high-quality components. We have created a sectional door that is attractive in design, reliable and provides safe operation for many years.





Torsion springs are equipped with **spring breaks** that stop the door leaf from falling in the case of spring breakage. This protection system is supplied at no extra cost to ensure safe operation.

ALUTECH doors comply with European standard EN 13241-1, EN 12604, EN 12453, EN 12424, EN 12425, EN 12426.





Adjustable roller brackets, allow the top panel to seal directly to the top profile. This greatly reduces draughts and heat loss.

This adjustment will be set to its optimum during installation. It is also possible to make fine adjustment over the years to ensure your Alutech door will always be energy efficient.




SILENT MOVEMENT



Alutech are one of only a few manufacturers that include **ball race bearings within the rollers.** This allows for a much smoother operation, reducing the amount of noise of the door.

These bearings are of a closed type that are protected from dust and moisture, and do not require and lubrication.

ALUTECH | Woodgrain or Smooth

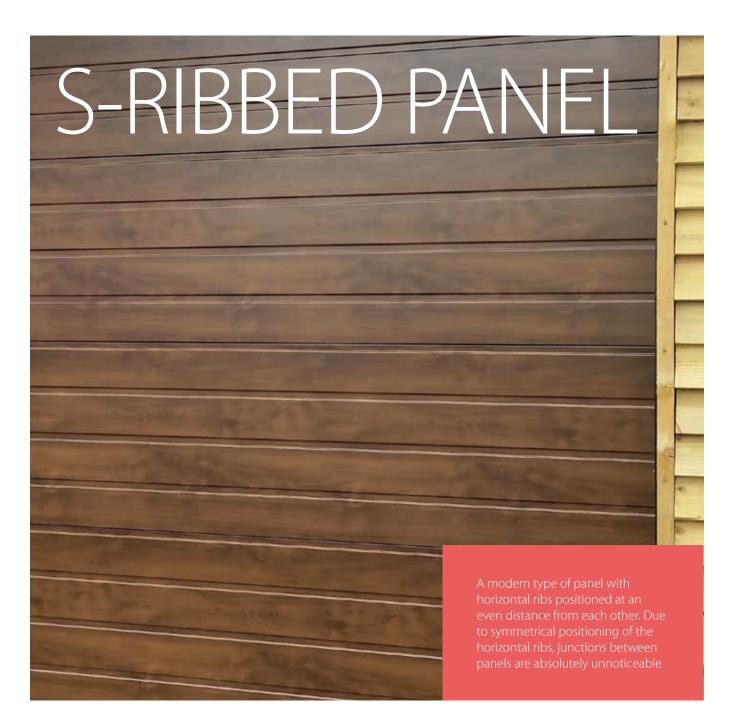

SECTIONAL GARAGE DOORS MADE FROM S-RIBBED PANELS

Trend without wicket Maximum door dimensions: **6000×3000 mm**

Trend with wicket Maximum door dimensions: **6000×3000 mm**



Door leaf

External surface texture of a panel **Woodgrain or Smooth**

made from **S-ribbed** panels

23 standard colours are closest match to the RAL colour stated



S-RIBBED PANEL

Wood finish colours

External surface texture of a panel Smooth

3 variants:



Woodgrain effect doors provide a realistic alternative to wood that will compliment your home. Its exclusive finish will look as good in the future as it would now.

Internal finish of the panel is textured

Standard colour White-and -grey (close to RAL 9002)

It is possible to finish doors in other RAL colours



SECTIONAL GARAGE DOORS MADE FROM M-RIBBED PANELS

Trend without wicket Maximum door dimensions: **6000** × **3000** mm



External surface texture of a panel **Woodgrain/Smooth**

Door leaf made from **M-ribbed** panels

23 standard colours are closest match to the RAL colour stated





SECTIONAL GARAGE DOORS FROM L-RIBBED PANELS

Trend without wicket Maximum door dimensions: **6000 × 3000 mm**



External surface texture of a panel **Woodgrain or Smooth**

Door leaf made from **L-ribbed** panels





SECTIONAL GARAGE DOORS WITH GEORGIAN PANELS

Trend without wicket Maximum door dimensions: **5000 × 3000 mm**

External surface texture of a panel **Woodgrain**

Door leaf made from **Georgian panels**

23 standard colours are closest match to the RAL colour stated





SECTIONAL GARAGE DOORS MADE FROM MICROWAVE PANELS


Trend without wicket Maximum door dimensions: **6000 × 3000 mm**

Trend with wicket Maximum door dimensions: **6000 × 3000 mm**


External surface of a panel **Woodgrain**

Door leaf type **microwave**

23 standard colours are closest match to the RAL colour stated

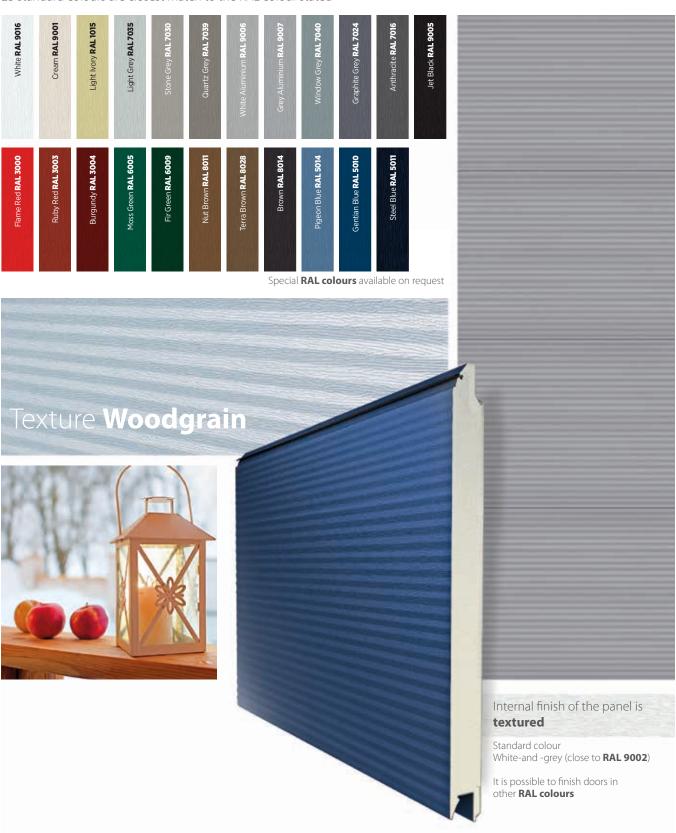

WICKET DOOR

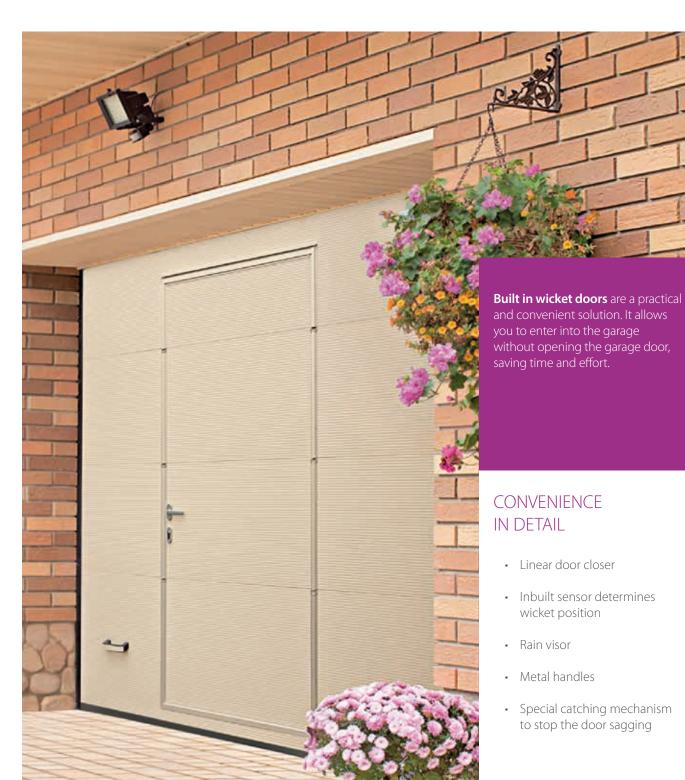



STANDARD THRESHOLD, 145 mm


For doors more than 4500×3000 mm Wicket with standard threshold has a reinforced construction. Designed for larger doors it is mounted into the doors with maximum dimensions. Maximum dimensions of doors with wicket are 6000×3000 mm

LOW THRESHOLD, 100 mm

For doors less than 4500 × 3000 mm Wicket with low threshold conforms to requirements of fire safety. It can be installed where an emergency exit is required.

Due to its shape such a threshold threshold provides unhampered passing for bicycles and carts through the wicket. Maximum dimensions of doors with wicket are $5000 \times 3000 \, \text{mm}$



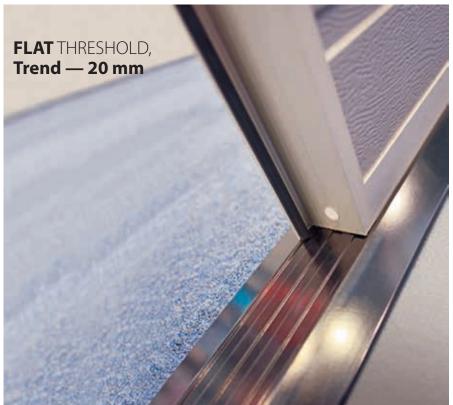

STANDARD COLOURS FOR FRAME OF WICKET DOOR

Colour of wicket handle matches the colour of wicket frame

Brown (powder coating, colour close to RAL 8014)


Silver aluminium (anodized coating, colour A00-D6)

other non standard colours are available on request



It is possible to paint the wicket profiles in other colours according to RAL catalogue

SIDE DOOR FROM SECTIONAL DOOR PANELS

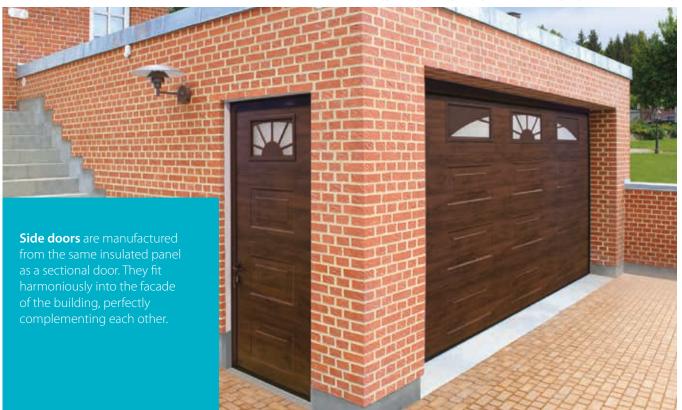

The external frame of the side door is manufactured from extruded aluminium and can be finished in the same colour as the door leaf.

Side doors can be installed to open to left or right and open to the inside or outside of the garage

Doors can be mounted as in between the brickwork opening or to the inside face to suit the customers specification

EPDM polyurethane sealing inserts are located along the door perimeter to ensure a reliable seal to the opening.

VARIANTS OF DESIGN



23 standard colours close to RAL, 3 wood finish colours



Side doors made to match your sectional door are available in both **Trend**

Standard colour of side door profiles — silver metalic (close to **RAL 9006**) white (close to **RAL 9016**) grey-brown (close to **RAL 8019**)

It is possible to paint the side door profiles in other colours according to RAL catalogue







23 standard colours close to **RAL** 3 wood finish colours





23 standard colours close to RAL

3 wood finish colours



23 standard colours close to RAL

2 wood finish colours









www.arridgegaragedoors.co.uk

ACCESSORIES

WINDOWS

Glazing for garage doors provide natural light and saves energy. They also contribute to the aesthetics of the door.

Windows are available in **Trend** doors, to suit any panel design you choose.

- Microwave
- S-ribbed panels
- · M-ribbed panels
- L-ribbed panels
- · Georgian panels

Frame and decorative inserts **Cross** and **Sunrise** — plastic

Colour of external frame and inserts — white and brown

If a coloured door is ordered the window surround and inserts are finished to the same colour as the door.



EXTERNAL RELEASE FOR FLECTRIC DOORS

Where there is no other access into the garage, we offer an external manual release to allow the door to be opened in the event of a power failure.

Classical rectangular window

Decorative glazing **Cross**

Decorative glazing **Sunrise**

Classical round window

Classical square window












LOCK

For manually operated doors, you can choose a colour coordinated high security locking device. Key operated from the outside, your lock can be positioned in either the middle, left or right hand side of the door.



STAINLESS STEEL WINDOWS

A choice of round or square windows with stainless steel frames are available for the contemporary design

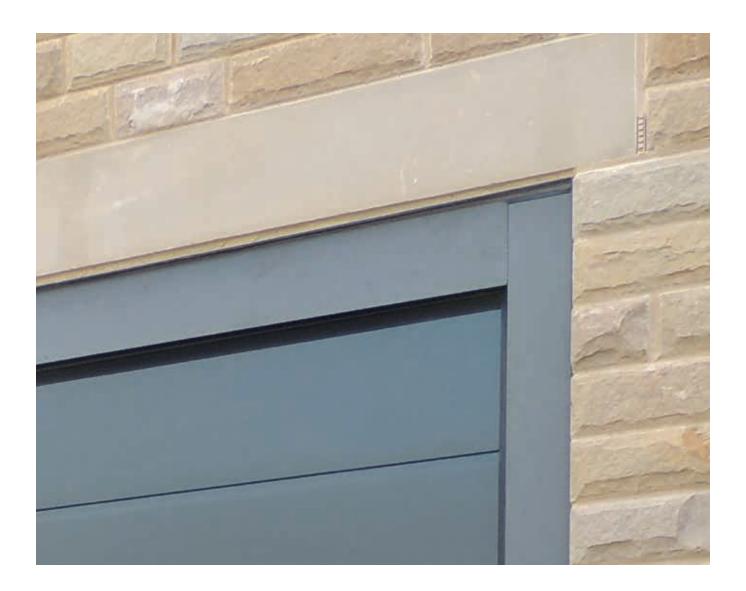


INBETWEEN BRICKWORK INSTALLATION

Unlimited options for mounting garage doors

The NEW FWO100/100-40, FWO100/120-40 and the FWO120/120-40 sets are a combination of two new profile sizes, with new design brackets for the frame legs and header sections.

The new L-shaped cover profiles are designed to cover frames that are installed within the opening. This gives the appearance of a bespoke made door and frame. All are available in our current range of colours offered by JD (UK) Ltd.

These new cover profiles are offered in 100mm and 120mm widths as allowing for the maximum drive through option in case of internal cabling or pipework that requires greater side room. The two new sizes are available for installation to the standard head frame profile and can be interchanged between leg and head frames. However the major advantage of the new FW0120 is that you can install the Alutech door and new Levigato automation in only 120mm of headroom!

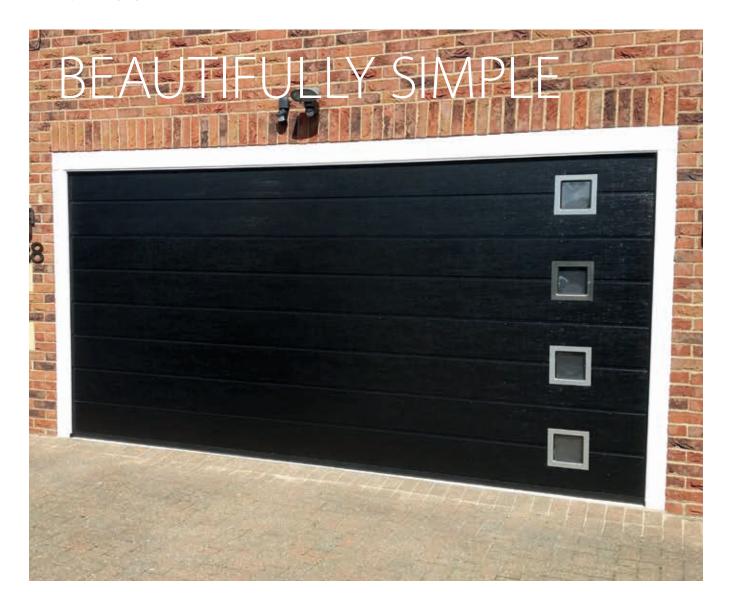

For a harmonious door view in the garage, with no requirement to have overhead springs suspended from the ceiling or fixed above the garage door opening, which can be unsightly and an inconvenience. The NEW Alutech double side sprung door is the perfect choice. Available for door sizes up to 4500mm wide and 2250 high.

By using advanced technology and years of experience in manufacturing. Alutech believe if it wasn't already, the Trend series of sectional door with carefully thought out design, functionality and beautiful aesthetics, is the perfect choice every time.

The new Alutech side sprung doors are only available with the new Alutech garage door operator. The door and automation system is a package that is fully CE compliant and in line with European safety regulations.



Alutech have teamed up with one of the world's most famous automotive design companies to bring you Levigato.

Pininfarina has a long established relationship with premium brand customers such as Rolls-Royce, Ferrari, Alfa Romeo, Lancia and Maserati and are responsible for the stylish designs of their motor vehicles. Alutech have now joined this illustrious group.

As you can see, they have definitely worked their magic with the appearance of the range of Alutech products. Tactile pebble inspired motor head and hand sets not only look great, they feel just like the quality you would expect.

With its sleek design, the Alutech Levigato automation system is available with a fantastic range of accessories.








1


THERMAL INSULATION

ALUTECH SECTION



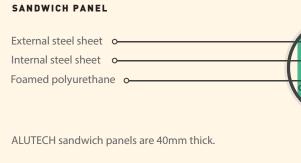

THERMAL INSULATION OF ALUTECH DOORS PANEL CORRESPONDS TO THE FOLLOWING MATERIALS




THERMAL TRANSMITTANCE OF ALUTECH DOORS

Trend Series $U = 1,35 \text{ W/(m}^2\text{K)}$

based on tests conducted at the Rosenheim Institute



2 SOUND INSULATION



RELIABLE COATING

RESISTANCE TO CORROSION



Zinc coating 16 microns thick and double layer polyurethane coating (25-35 microns) on the panel outer surface which is modified with polyamide particles (PUR-PA) which protects the sandwich panels from scratches and abrasions caused by mechanical action and the e ects of rain and coastal conditions.

Door panels and components have been confirmed in tests as being suitable for use in coastal conditions for up to 15 years.

DURABILITY

15000

open/close cycles



which is equal to

10 YEARS

of operation with 4 open/close cycles per day



AUTOMATIC



Doors open in around **15 seconds**



IT IS KNOWN

The number of rainy days Thus you will get wet 195

AL GARAGE DOORS

/ANTAGES



RESISTANCE TO WIND LOADS


Doors withstand wind speed up to 120 km/h



EXCELLENT DESIGN

DIFFERENT PANEL PATTERNS

To suit all decorative styles

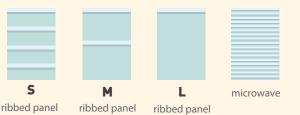

COLOUR RANGE

23 standard colours



Wood finish colours







Learn more about di erent types of panels and colours

Can be finished



georgian

FORT

OPERATION



Operate your door without leaving the car



in Britain is 195. times less.

VERTICAL OPENING



Saving space in front of the garage



Don't have to clear snow in front of the garage

SAFETY

Correspond to European standards EN 12604 and EN 12453

PROTECTION AGAINST DOOR LEAF FALLING

1 m² of door leaf weighs approximately 15 kg. Weight of medium size door of Trend Series (7 m²) — is morethan 100 kg.

The door leaf is safely balanced with springs that do not move independently. A special device protects against spring break and the door leaf falling.

DOOR STOPS IF IT MEETS AN OBSTRUCTION



PROTECTING AGAINST FINGER TRAPPING



100KG

Sandwich panel design protects against finger trapping



Alutech Door systems



AluminTechno



Alutech Incorporated

The Alutech Group of Companies is one of the leaders in the production of roller shutter systems and sectional doors systems in Western and Eastern Europe, and a leading manufacturer of aluminum profile systems in the CIS countries. The group has 5 manufacturing sites, in Germany and Belarus, with sales companies covering many parts of the world.

All sites are equipped with the most up to date, high tech equipment, that include automated painting lines, high quality slitting plants for aluminium and steel coil, modern efficient line for manufacturing sandwich panels for sectional doors, rollforming lines for insulated roller door lath, lines for extruded aluminium profiles, automated complex for die casting aluminium components and modern lines for powder coating, one of the biggest lines for anodizing in CIS countries.

High-tech equipment and our own manufacturing plants allows the specialists in Alutech to control the quality of production in every stage of the manufacturing process: from procurement of raw materails to manufacturing the finished product and its packaging. The quality management system in all group companies meets the requirements of ISO 9001 International standard in TUV CERT system, which is confirmed by the corresponding certificates.

Alutech Group of Companies are actively expanding, in both its markets and products. Alutech Sectional doors are manufactured both in Germany and Belarus, with capacity of over 250,000 sectional doors each year, our main markets are Germany, UK, France, Austria, Holland and most other Eastern and Western European countries.

Alutech Sectional doors perfectly combine comfort, security and safety to provide quality and style to compliment your home.



JD (UK) Limited

Ravensthorpe Industrial Estate Low Mill Lane Havelock Street Ravensthorpe Dewsbury WF13 3LN T: 01924 472924 E: sales@jdukltd.co.uk **www.jdukltd.co.uk**



